


SIDEWALK PATIO FIGURE

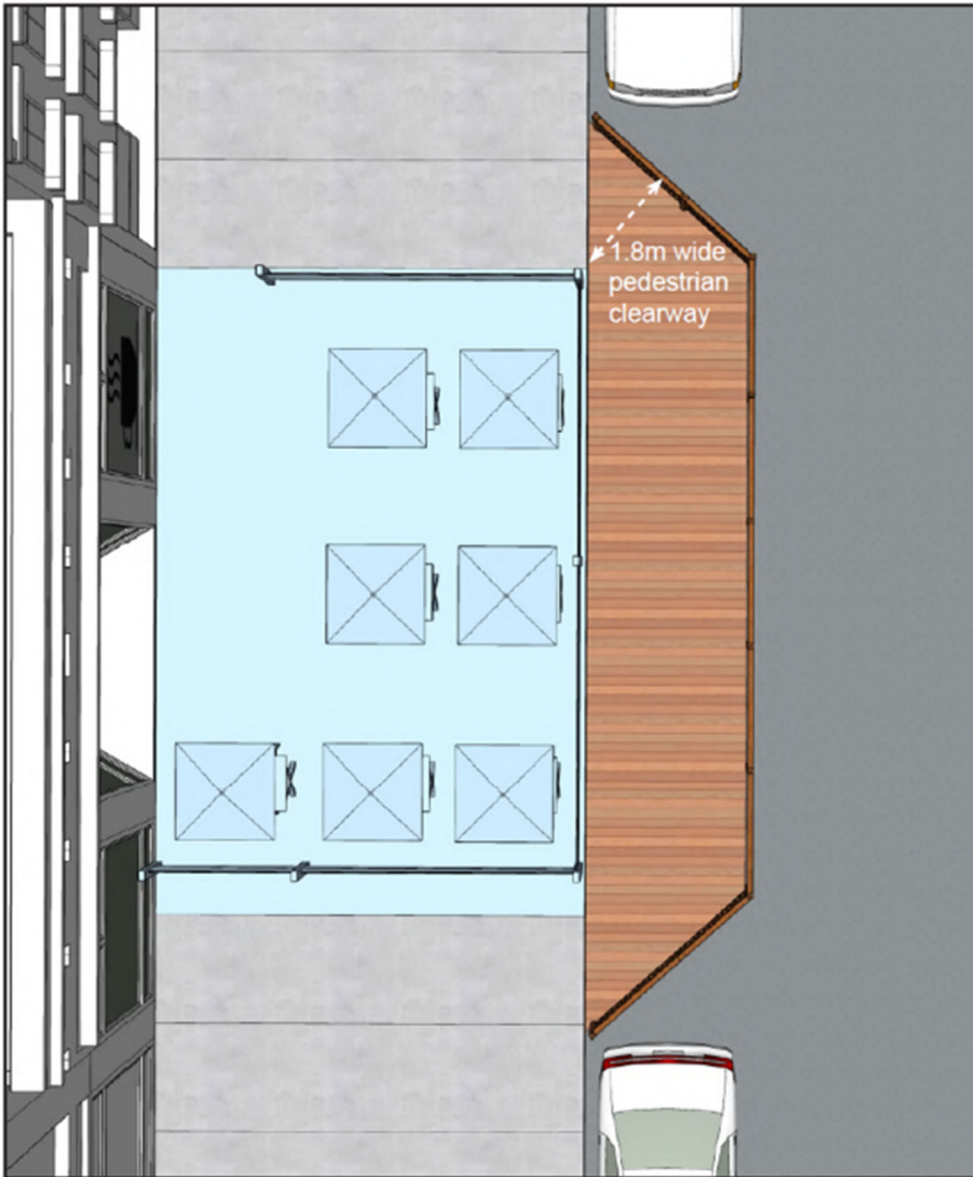

NOTE: ROADSIDE PROTECTION DETAILS NOT SHOWN

Option 1B

Parking Lane Closed

Parking-Lane

Thru-Lane

Sidewalk Diversion

No Sidewalk Diversion

Single Lane - One Way

Single Lane - 2 Direction

Multi-Lane

High Risk

* Refer to OTM Book 7, Table B

NOTES

i) Barriers to be placed between 25-45 degrees upstream of patio to protect from lateral impact

ii) Barriers installed to have minimum requirement of MASH test level TL-1 (or equivalent)

ii) Temporary sidewalk to meet or exceed AODA requirements